

Choose Results File

Browse...

NEOSresult_Lower Connecticut River_2026-05-06.txt

Upload complete

Choose the corresponding `01\_UserSpecs\_loadingtargets\_selected.csv` file

Browse...

01_UserSpecs_loadingtargets_selected.csv

Upload complete

Choose WWTP File

Browse...

WWTP_COMIDs.csv

Upload complete

Choose SPARROW Inputs File

Browse...

ne_sparrow_model_input_short.csv

Upload complete

Choose State Cropland Streamcat Files

Browse...

CT_NH_MA_VT_NY_RI_StreamCatData_2019.csv

Upload complete

Important: Selecting 'Preview Uploads' or 'View NEOS Results' before all uploads have completed may produce unexpected results. Previews can be found under the 'File Preview' tab, and generated reports can be found under the 'View Results' tab.

Preview Uploads

View NEOS Results

Postprocessing Step

RBEROST Results Postprocessing Step

File Preview

View Results

View available scenarios

1

▼

Scaled-up Optimization Results

To save this report, open the RBEROST postprocessor in a web browser and use the print to pdf functionality.


User Notes:

Your model has successfully solved.

The total cost to reduce loads to the limit you provided is \$32,787,453,470.00.

Estimates of Total Annualized Cost ranged from \$25,071,057,222.25 to \$40,383,861,012.50. RBEROST costs are usually most influenced by the amount of retrofitting necessary to install urban BMPs. More retrofitting leads to higher costs.


Below is the probability density distribution of cost estimates for this scenario.

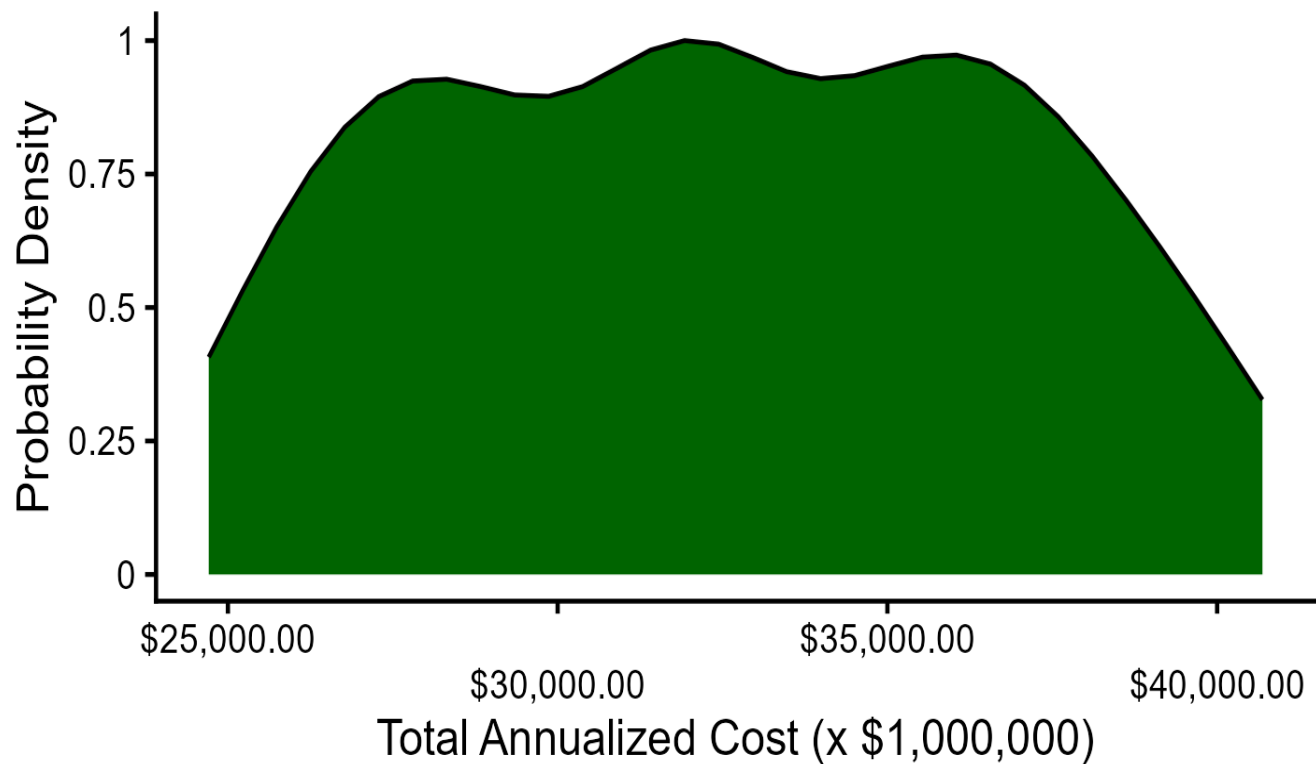

This suggested plan has an estimated minimum of 73% likelihood of meeting each of the specified loading targets. Likelihoods of meeting each specified loading target individually are listed in the table below. 'Likelihood' refers to the percentage of the probability density of estimated total annual load that falls below the user specified loading target.

Loading Target	Your Specified Target Load	95% CI of Estimated Annual Total Loading	Likelihood of Meeting Your Loading Target
Lower Connecticut River	10% reduction in TN; or 2,683,942.0 kg N/yr	2,061,410.4 - 2,971,983.7 kg N/yr	73%

Below are the probability density distributions of total annual load estimates at each of the loading targets specified by the user. The vertical dotted grey lines denote the specified target loads at each loading target. Probability densities to the left of the grey line are load estimates that meet the loading target, and probability densities to the right of the grey line are load estimates that exceed the loading target.

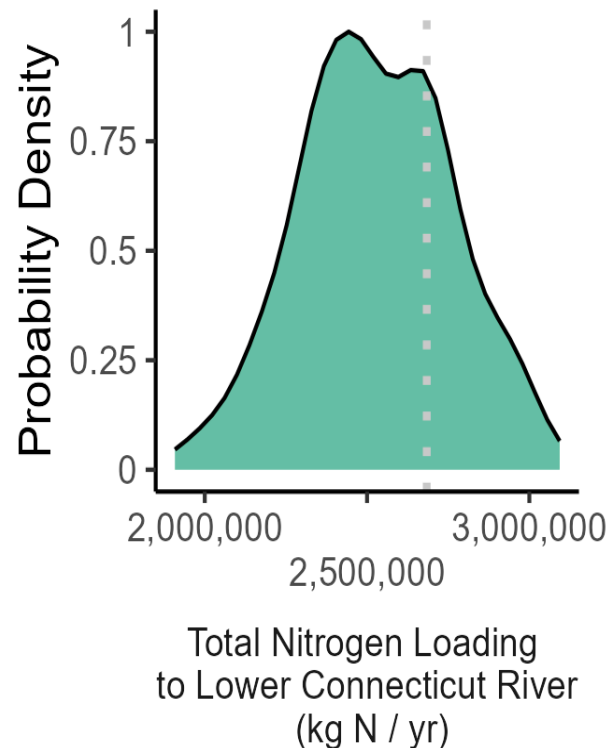

The model did not implement any WWTP retrofits.

The model chose to implement the total area of the following agricultural BMPs:

Cover crops (ac)	Filterstrip (ac)	Terrace Waterway (ac)
12,698.5	9,750.3	2,480.5

Download Agricultural BMPs by COMID ([session/70a43bcd1a69aaf75df6d5ef972ca3/download/downloadadagdat?w=](https://www.epa.gov/comid/session/70a43bcd1a69aaf75df6d5ef972ca3/download/downloadadagdat?w=))

The model chose to implement the total area of the following urban BMPs.

Enhanced Biofiltration w ISR (ac)	Gravel Wetland (ac)	Porous Pavement w underdrain (ac)
88,312.4	1.3	7,986.7

Download Urban BMPs by COMID (session/70a43bc1a69a75df6d5ef972ca3/download/downloadurbandat?w=)

The model chose to implement the total length of the following riparian buffer BMPs.

Forested Buffer (ft of bank)	Grassed Buffer (ft of bank)
24,489.6	3,191,289.4

Download Riparian Buffer BMPs by COMID
(session/70a43bc1a69a75df6d5ef972ca3/download/downloadripariobufdat?w=)

The model chose to implement the total number of parcels for the following septic BMPs.

class 1 upgrade (parcels)	class 2 upgrade (parcels)	class 3 upgrade (parcels)	class 4 upgrade (parcels)	class 5 upgrade (parcels)	class 6 upgrade (parcels)	class 7 upgrade (parcels)	class 8 upgrade (parcels)
80	413	742	3,874	1	39	68	407

Download Septic BMPs by COMID (session/70a43bc1a69a75df6d5ef972ca3/download/downloadsepticdat?w=)